MADE GOODS

MARJORIE SCONCE

INSTALLATION & ASSEMBLY INSTRUCTIONS

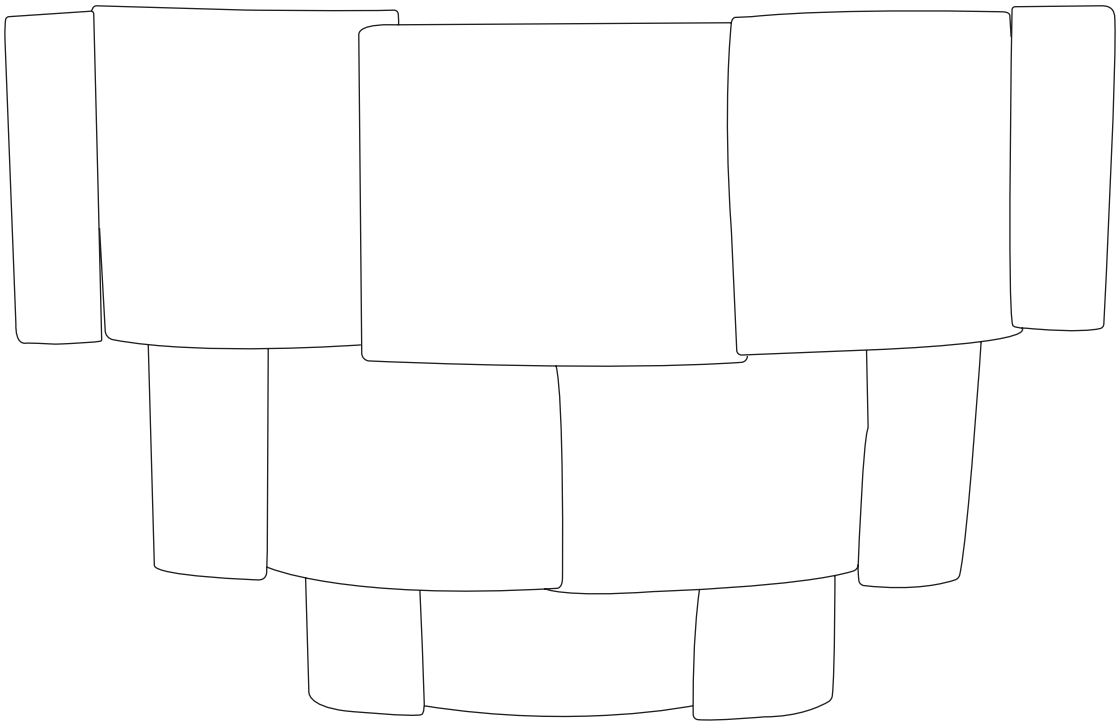

Tools and Materials Required (not included):

Ladder

Wire Cutter/Stripper,

Electrical Tape,

Padded, flat, nonabrasive work surface such as a blanket,

Phillips head Screwdriver & Flat Blade Screwdriver

Two (2) 40-watt maximum TYPE B standard incandescent light bulbs or two (2) 9-watt maximum compact fluorescent light bulbs or two (2) 4.5-watt maximum SBLED light bulbs

PARTS LIST

· Crossbar (A) – 1

· Mounting Screw (B) – 2

· Wire Connector (C) – 3

· Ground Wire (D) – 1



· Green Ground Screw (E)



· Back Plate (F) - 1



· Back Plate Screw (G) – 2

· E12 Socket (H) – 2

· Fixture Wire (I) – 1



· Decorative Shade (J) – 1



· Star Washers (K) – 2

BEFORE BEGINNING INSTALLATION

CAUTION: SHUT OFF THE POWER AT THE MAIN UTILITY BOX BEFORE DOING ANY ELECTRICAL CONNECTIONS TO AVOID ANY RISK OF ELECTRICAL HAZARD.

IMPORTANT SAFETY INSTRUCTIONS:

- These instructions are provided for your safety. It is important that they are read carefully before use to ensure safe operation of the product.
- We strongly recommend that a professional electrician install all direct wire fixtures.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- **The lighting fixture is meant for indoor use. It must be connected only to 3-wire, single-phase electrical supply systems (provided with Ground wire or equivalent protection system).**
- This fixture has been rated for up to (2) 40-watt maximum TYPE B standard incandescent light bulbs (not included) or two (2) 9-watt maximum compact fluorescent light bulbs or two (2) 4.5-watt maximum SBLED light bulbs (not included). To avoid the risk of fire, do not exceed the recommended lamp wattage.
- The lighting fixture is meant for indoor use, DRY LOCATIONS ONLY.
- Save these instructions.

WARNING:

- **To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing light bulb.**
- **Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.**
- **Keep flammable materials away from lit bulb.**
- **Check the cable properly for any loose or damage connections.**
- **When the unit is no longer functioning, do not attempt to fix it by yourself. Only qualified technician is allowed to disassemble and repair.**
- **If the external flexible cable cord of this luminaire is damaged it shall be exclusively replaced by a qualified electrician in order to avoid hazard.**

PRE-ASSEMBLY:

- Remove all parts and hardware from box along with any plastic protective packaging.
- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- For your safety and convenience, assembly by two people is recommended.

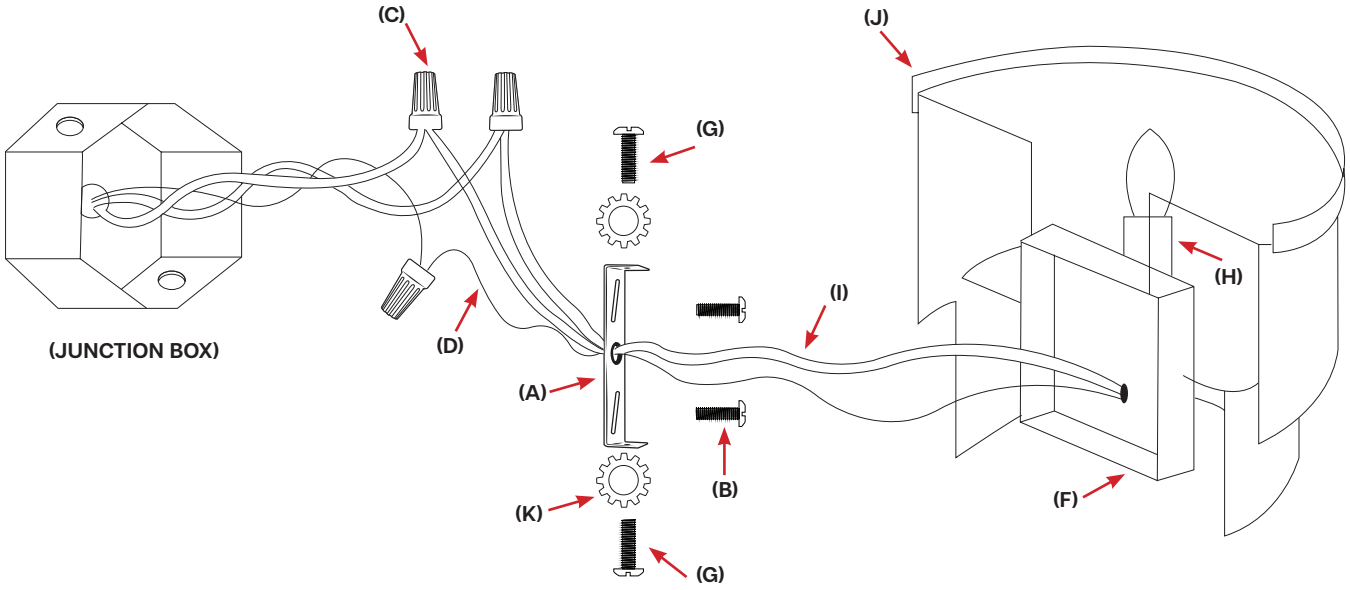

INSTALLATION INSTRUCTIONS

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.

2. Gently pull existing wires from the junction box on the wall and allow them to hang. (Fig. 1)

3. Secure the crossbar (A) to the junction box with the Mounting Screws (B). Tighten until snug. (Fig. 1)

Fig. 1

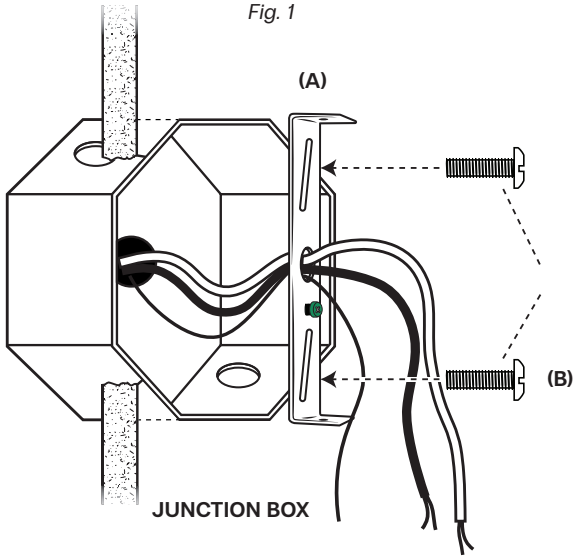

4. Establish electrical connections (fig. 2):

a) Connect the neutral fixture wire (has ridges molded on the outside insulation) to the neutral junction box wire (usually white insulation). Fasten each together with a wire connector (C) and wrap the connection with electrical tape. Be sure that no wire strands are exposed.

b) Connect the hot fixture wire (has insulation that is smooth) to the hot junction box wire (usually black insulation). Fasten each together with a wire connector (C) and wrap the connection with electrical tape. Be sure that no wire strands are exposed. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**

c) Connect the ground wire (D) of the fixture to the ground j-box wire. Fasten the wires together with a wire connector (C) and wrap the connection with electrical tape. Be sure that no wire strands are exposed. If there is no ground wire in the j-box, use a screwdriver to secure the end of the fixture ground wire to the green ground screw (E) located on the crossbar (A). Wrap the wire around the screw once clockwise and then tighten the screw. Make sure that the wire is held firmly by the screw and did not slip out during tightening.

Fig. 2

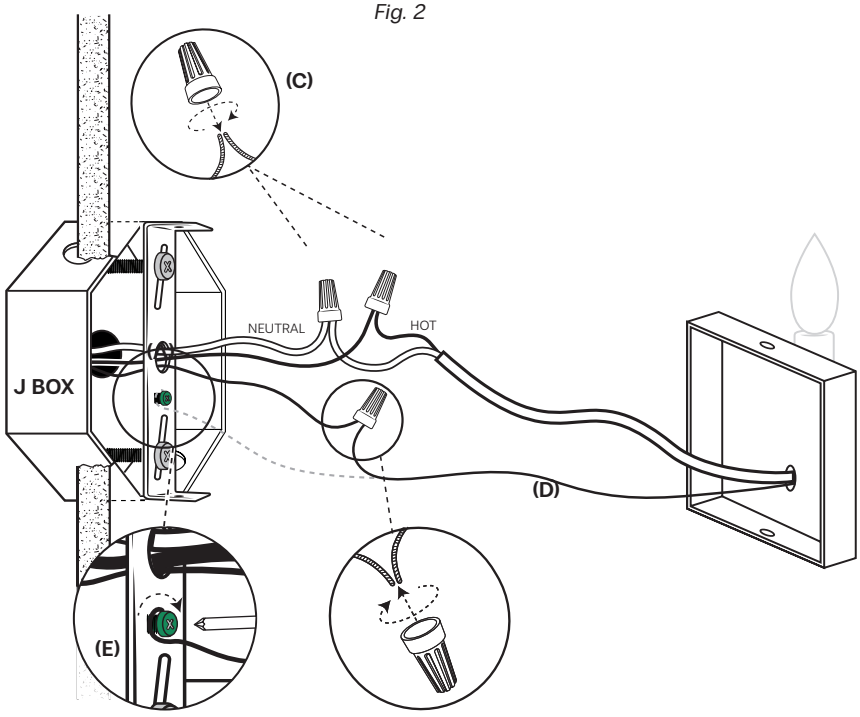

5. After all connections are made attach the back plate (F) to the crossbar (A). Align the holes of the crossbar with the holes located in the top and bottom of the back plate. Using a screwdriver insert the back plate screws (G) and star washers (K) through each hole of the back plate and into threaded engagement with the crossbar. Do not over-tighten the screws. (Fig. 3)

6. Insert two (2) 40-watt maximum TYPE B standard incandescent light bulbs (not included) or two (2) 9-watt maximum compact fluorescent light bulbs (not included) or two (2) 4.5-watt maximum SBLED light bulbs (not included) into the socket (H). DO NOT EXCEED THE RECOMMENDED WATTAGE.

7. Restore power to wall outlet junction box and test fixture.

8. Installation is complete.
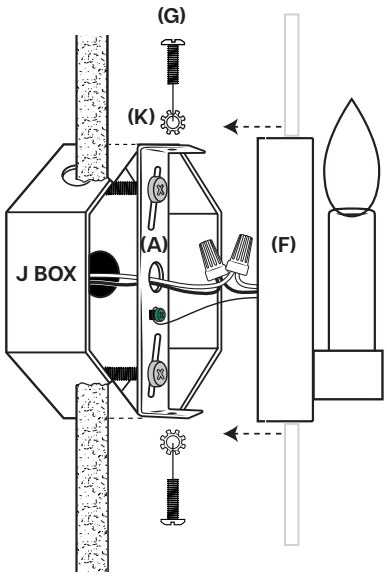
Fig. 3